SL 380 Outdoor High Lifter

for indoor and outdoor use



the lifting device easily reach heights where panes have be transported across e.g. fences.

The long arms of

- Two vacuum circuits with two pumps
- Off road with front-wheel drive and big wheels with electronic brake
- Maneuverable with dual rear wheels
- Lifting height 110 in (center of yoke)
- Ergonomic operation handle
- Waterproof according to ip65
- Foam filled tires



The long arm rea-

ches easily across obstacles such as

The Smartlift is easily transported in a van or on a trailer




4910 Wilshire Boulevard • Country Club Hills, IL 60478 Phone: 815-931-4825 • www.greatlakeslifting.com



of windows in end walls etc.

SL 380 Outdoor High Lifter



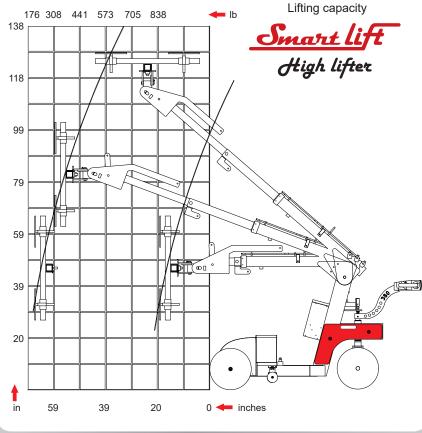

Technical data

Technical data	
Description	Value
Weight	1499 lb
Height	53.2 in
Width (min)	32.3 in
Length (min)	86.7 in
Extension of arm	23.6 + 23.6 in
Tip from horizontal	45° back og 90° forward
Speedregulation	Stepless high/low
Sideshift	3.9 in
Vacuum system	2-circuits
Lifting height	128 in
Chargingvoltage	115 volt
Integrated charger	Blue Power 24/12
Chargingtime	Approx 8 hours
Battery (2 x 12v) 24 volt	2 x 105 Ah
Runningperiod	Approx 30 hours
Front-wheel drive	1.61 hp
Brake	Elektronisk
Suction pads	4 unit Ø 11.8 mm
Automatic suction	2 vacuum pumps
Lifting capacity arm in/extended (47.3 in)	837 lb/220 lb

