

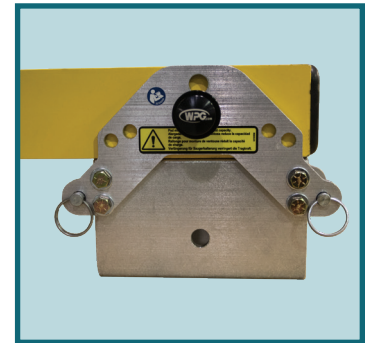



# ADJUSTABLE SPACERS FOR MOVABLE PAD MOUNTS


Enable vacuum lifters to handle windows with mullions or other materials with surface obstructions.

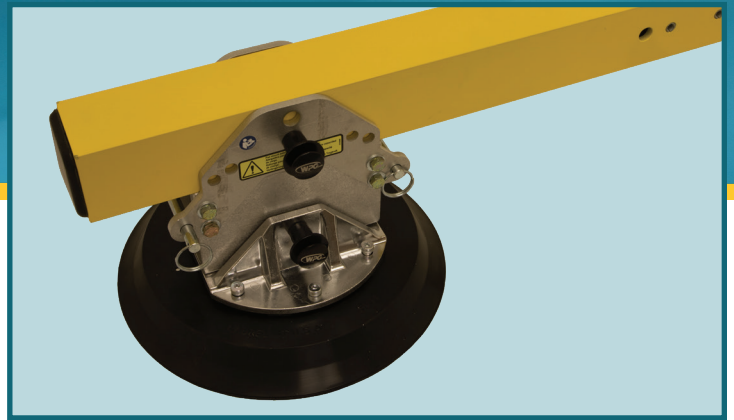


- Designed for use with MRT4-DC(3), MRTA8-DC3, MRTALP8-DC3 or any other WPG lifter equipped with movable pad mounts.
- No tools required! Cotterless hitch pins make installation or removal of spacers fast and easy.
- Available in different sizes, to optimize spacing distance for your application.\*

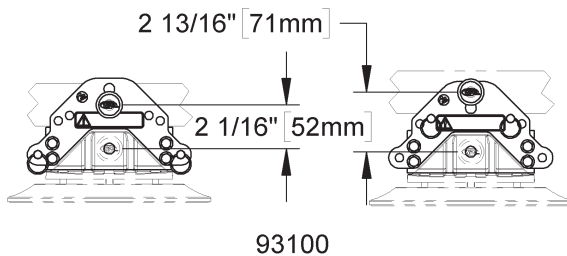


93100

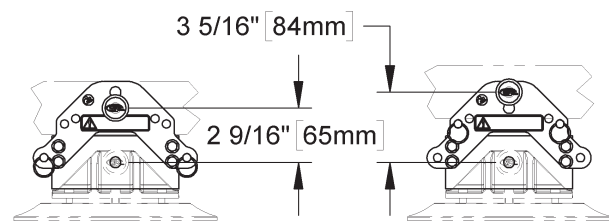

93101

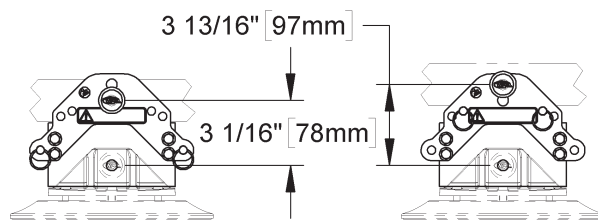

93100AM

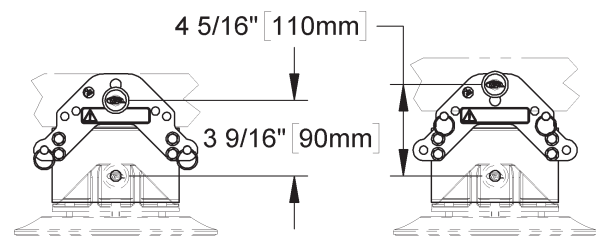

93101AM

ADJUSTABLE SPACERS SHOWN MOUNTED ON PAD FRAME TUBES

\*Spacers limit lifting capacity in many instances. Please contact a Technical Sales Representative for more information.

Stock#	Lifter's Frame Tube Size	Short Spacing Distance	Long Spacing Distance
93100	2" [51 mm]	2-1/16" [52 mm]	2-13/16" [71 mm]
93100AM	2" [51 mm]	3-1/16" [78 mm]	3-13/16" [97 mm]
93101	2-1/2" [63 mm]	2-9/16" [65 mm]	3-5/16" [84 mm]
93101AM	2-1/2" [63 mm]	3-9/16" [90 mm]	4-5/16" [109 mm]
<b>Maximum Structural Capacity</b>	184 lbs [83 kg] per Adjustable Spacer		



Based on product information at time of publication. Environmental conditions can affect product performance and longevity; consult the product instructions on WPG.com or contact a Technical Sales Representative for more information.