SL 608 Outdoor High Lifter

for outdoor and indoor use



SL 608 Outdoor High Lifter lifts up to 1340 lbs

- Off road with front-wheel drive
- Maneuverable with dual rear wheels
- Foam filled tires
- Self-driven
- Flectronic brake
- · Lifting height 146 in (center of yoke)
- Two vacuum circuits with two pumps
- 4 Suction pads Ø 15.8 in
- Ergonomic operation handle
- Waterproof according to ip65



The carrying arm is equipped with an electrical extension and an additional manual extension arm for extra reach.



The lift can shift up to 3.9 in for accurate adjustments during installations.

SmartLift® USA 9232 Gulfstream Road, Unit D Frankfort, Illinois 60423 (815) 931-4825



SL 608 Outdoor High Lifter



The vacuum system is separated into two circuits (separate blue and red hoses) for the highest level of security.




The compact Smartlift design allows for easy transport by van or trailer.



The yoke allows multidirectional movement.



The lifting head has two settings with adjustable locking bolts. The head can be tilted towards the ceiling or floor.

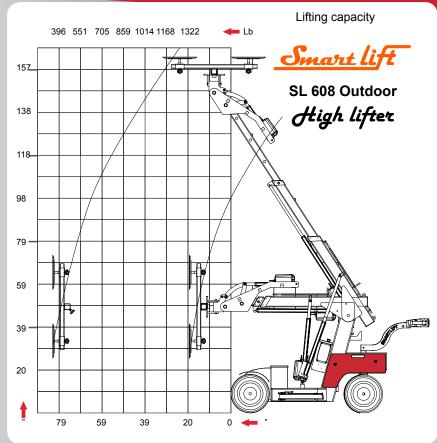

Technical data Description Value 2050 lb Weight 60.3 in Height Width (min) 32.7 in Length (min) 90 in Extension of arm 27.6 in + 35,4 in 40° back/100° forward Tip from horizontal Stepless high/low Speed regulation Sideshift 3.9 in Vacuum system 2 circuits 160.6 in Lifting height mounting Charging voltage 115 volt Integrated charger Victron Energy Charging time Approx 8 hours Battery(2 x 12v) 24 volt 2 x 105 Ah Running period Approx 20 hours Front-wheel drive 1.61 hp Brake Electronic Suction pads 4 unit Ø 15.8 in Lifting capacity arm 1340 lb / 330 lb in/extended (63 in)

